



# FOLDING SECURITY DOORS



Built to last.®

EAB's folding security doors withstand tough conditions and meet the requirements for burglar-proof industrial doors in accordance with SSF 1074 edition 1, class 2.




## FOLDING SECURITY DOORS

EAB's manual security folding doors are frame-built from welded steel profiles in a hot-dip galvanised design, which can withstand tough conditions and stand up to being realigned. They are well known for their strength and reliability, each door is made in Smålandsstenar under strict quality control.

The doors are manufactured as 2, 3 or 4 section folding doors and are designed for manual operation. If the glazed section is optional, then doors are supplied with insulating panes of P5A glass, mounted in steel strips. The steel cladding is screwed onto the door frame using our own special screws, which means that steel sheet is easily replaced if it becomes damaged.

When it comes to surface treatment and dimensions, there are a wide range of options, choose the solution that best suits you and your business.

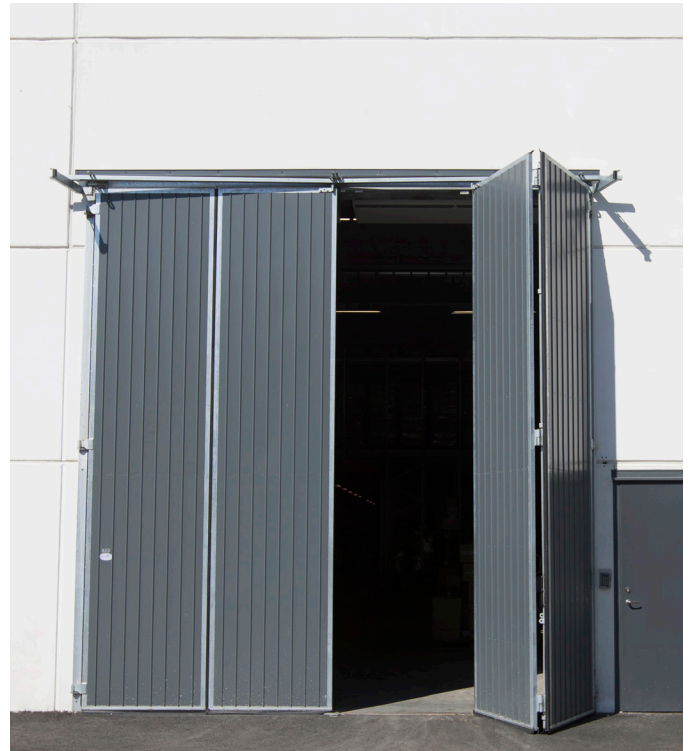

### SECURE AND STABLE

EAB's security folding doors are built to meet requirements. They meet the requirements of SSF 1074 edition 1, class 2 as burglar-proof industrial doors. The doors are CE marked in accordance with the EU Construction Products Regulation and fulfil the requirements found in Swedish standard SS-EN 13241-1.

### ROBUST DESIGN

Our folding doors are frame-built from welded, hot-dip galvanised steel profiles that can withstand tough conditions and can be realigned. They are manufactured with 2, 3, or 4 sections and are designed for manual operation. Maximum dimensions are 6,000 x 6,000 mm.

### 10 YEAR GUARANTEE

We know that our doors will last and that they keep our promises. Therefore, a 10-year guarantee is always included regardless of the solution you choose. Each door is manufactured in our own factory in Smålandsstenar.



Black lacquered steel sheet, 4 section, safety folding door with a row of glazing.



Sheet in the colour *Conifer green*, with a row of glazing.




Security folding door, internally lined with hot-dip galvanised smooth steel sheet.



Silver coated, 4 section security folding door.



White lacquered, 4 section, security folding door with a row of glazing.

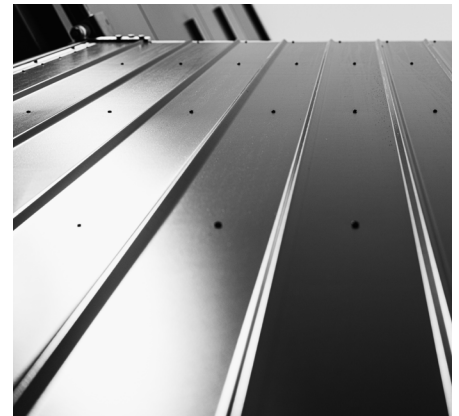

The steel cladding is screwed onto the door frame using our own special screws, which makes it easy to replace if it becomes damaged.


## CUSTOMISE YOUR DOOR

At EAB we create concrete proof every day that a durable and functional door does not need to be boring. With 60 years' experience in door manufacturing, we know the art of combining design, function and durability. The options for customising your door are endless.

All our doors are hot-dip galvanised in their basic design and there are several different surface treatment options available, depending on the environment in which the door is placed. Choose a lacquered sheet as cladding in a colour that exactly fits your profile and add a glazed section to let in natural light. **Would you like to find out more about our security folding doors and how you can customise your door?** Scan the QR code or go to [www.eab.info/folding-security-doors](http://www.eab.info/folding-security-doors)



## STANDARD COLOURS

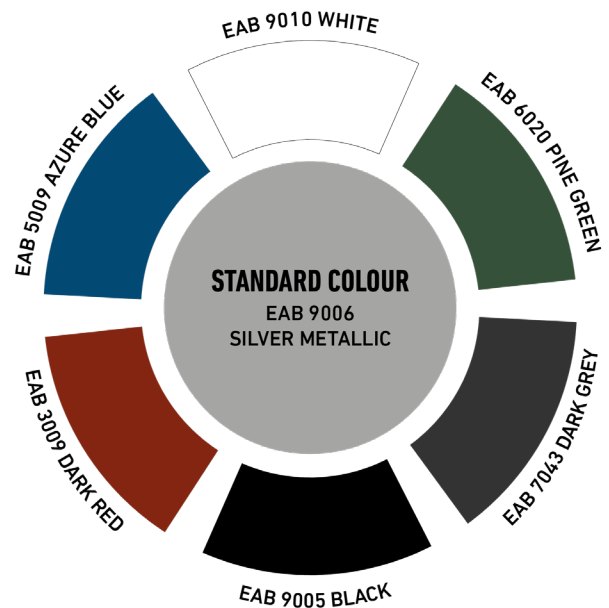

# FACTS

## Construction

EAB's folding security doors are frame-built, can withstand tough conditions and can be realigned. They are manufactured as 2, 3 or 4 section, manual operation. Max W x H: 6,000 x 6,000 mm. Our security folding doors meet the requirements as burglar-proof industrial doors according to SSF 1074 edition 1, class 2, when secured with at least 2 padlocks, at least class 3 in accordance with SSFN 014.

## Door leaf

Hot-dip galvanised square tube frame. Externally clad with silver coated EAB profiled sheet 9006 as basic version, or alternatively painted in any standard EAB colour. Interior clad with hot-dip galvanised smooth steel sheet.

## Fittings

- Lubrication-free and welded hinges.
- Ball bearing guide fittings or carrier fittings that runs in C-profiles.

- Guide lug on floor in the door centre.
- Internal locking with espagnolettes. DEJO 55100. The espagnolettes are fitted with eyelets for padlocks.
- The doors cannot be supplied with an access door.

## Insulation

Intermediate insulation of 40 or alternatively 60 mm mineral wool, density 80 kg/m<sup>3</sup>.

## Glazing

The doors are delivered with insulated panes with P5A glass, mounted in steel strips.

## Seals

All sealing strips are screwed to the door frame between door sections, against the frame and floor.

## Surface treatment

Option 1: Hot-dip galvanised door leaf frame with exterior clad in silver coated

EAB profile sheet 9006. Cover the interior with hot-dip galvanised steel sheet.


Option 2: Hot-dip galvanised door leaf frame with lacquered steel sheet cladding in standard colours.

Option 3: Painting treatment on hot-dip galvanised door leaf frame and steel sheet cladding in any colour.

## Frame

EAB manufactures and stocks frames in U and L profiles as well as square tubes.

EAB's doors are CE-marked in accordance with the Construction Product Regulation and the Machinery Directive, they also meet the requirements of the local standard SS-EN 13241-1.

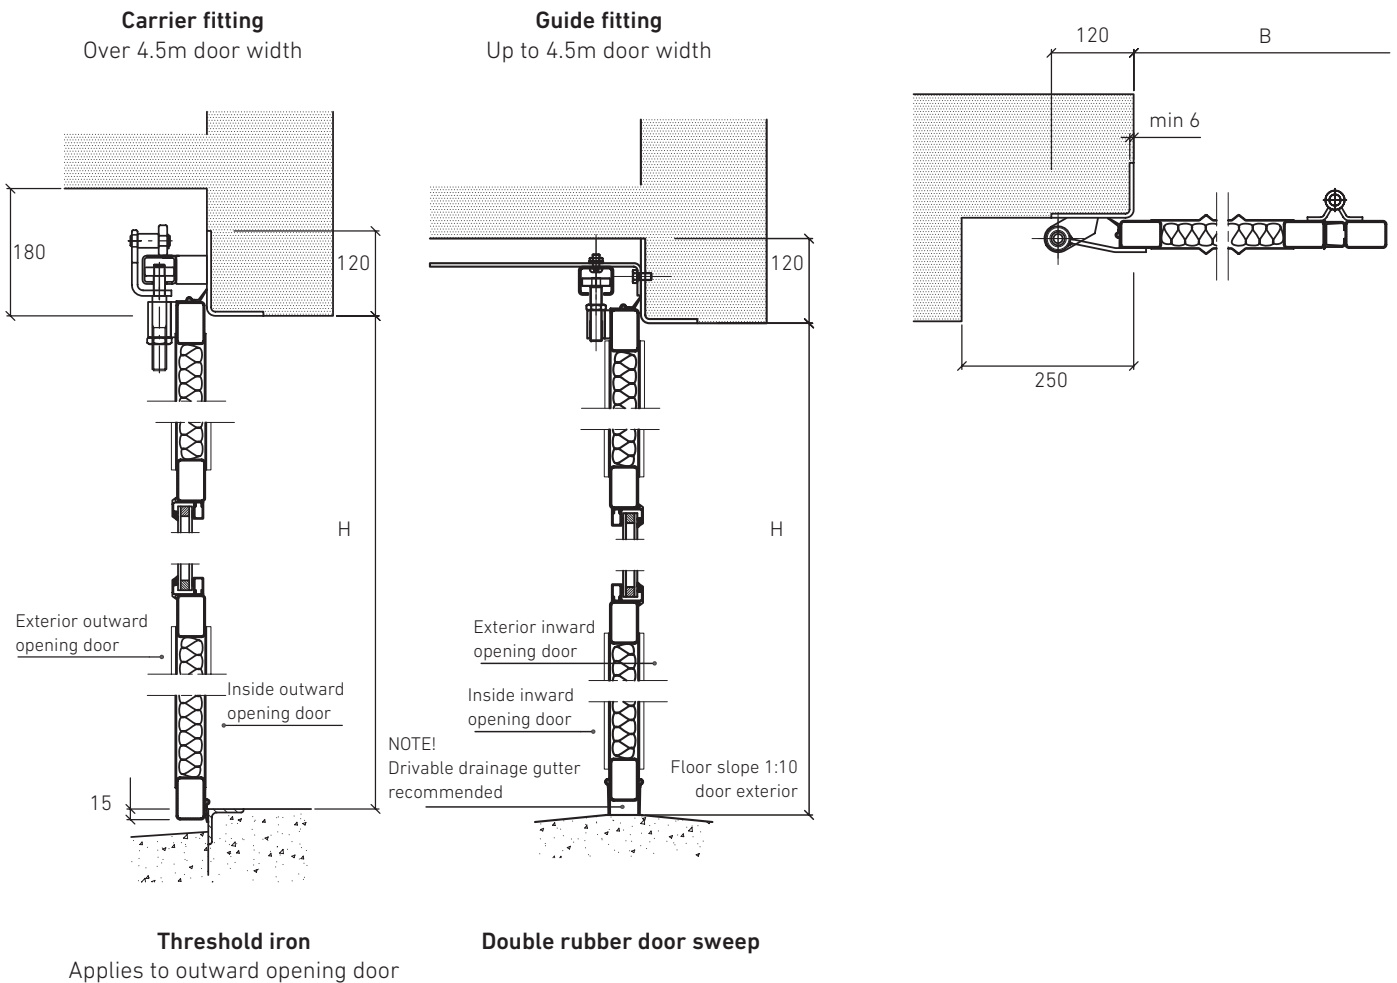

Built to last.\*

STORAGE EQUIPMENT | DOORS | STEEL BUILDINGS  
333 33 SMÅLANDSSTENAR | +46 371 340 00 | WWW.EAB.INFO

